
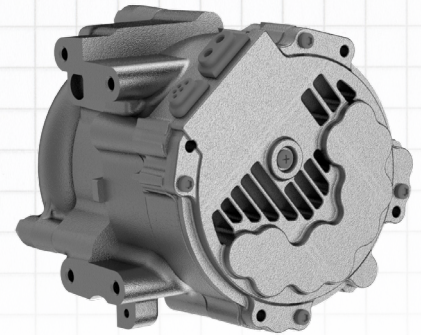
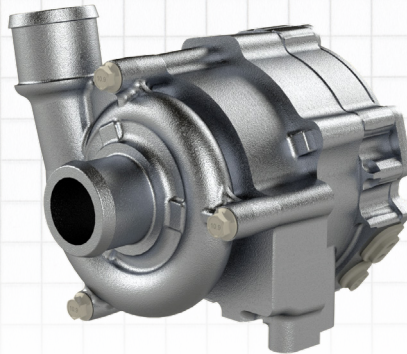


# WP150 ELECTRIC WATER PUMP


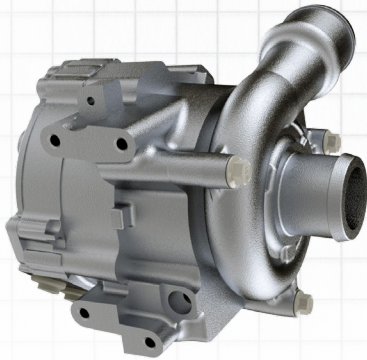


## PUMP FEATURES

Fully controllable or single speed  
 High efficiency design  
 12 or 24 volt models  
 Corrosion and water resistant  
 Compact and quiet

## SPECIFICATIONS

Rated Voltage	9-18 VDC or 18-32 VDC
Operating Temperature	-40° to 95°C (203°F)
Storage Temperature	-40° to 125°C (257°F)
Controlled or single speed	CAN

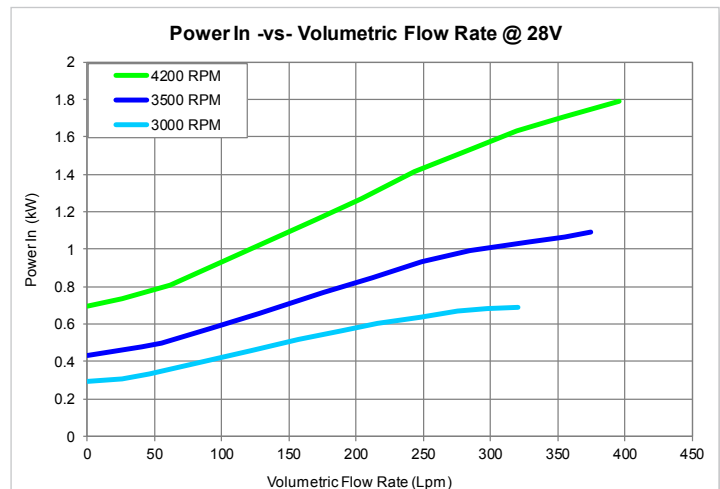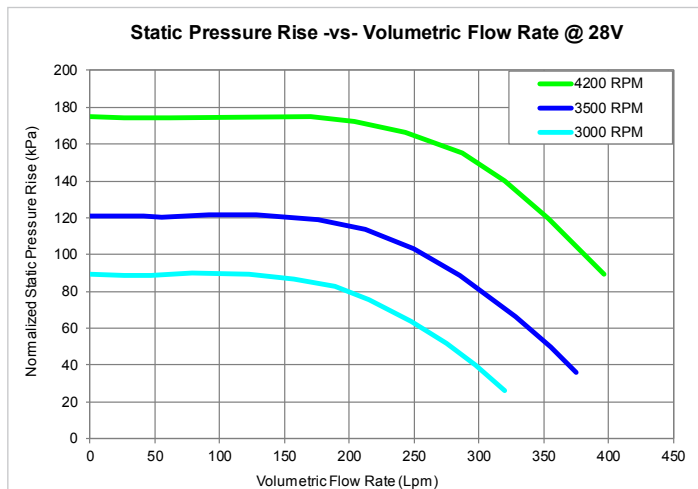

## CONTROLLER FEATURES

Configurable through EMPower Connect™ service tool  
 Behaves as an on/off controller in absence of CAN  
 Full variable control by: CAN SAE J1939-15  
 Protected from transients, short circuit, and reverse battery  
 Diagnostic capability

## SPECIFICATIONS

Power Supply	12 VDC -or- 24VDC
Weight	18 lbs (8.16 kg)
Inlet Connection	2.0" (50.8 mm) hose
Outlet Connection	2.0" (50.8 mm) hose
Target Life	20,000 hours
Temperature Range	-40 to 95° C (203°F)
Housing Construction	Cast Aluminum